


Raccordo tipo VR C Coupling type VR C

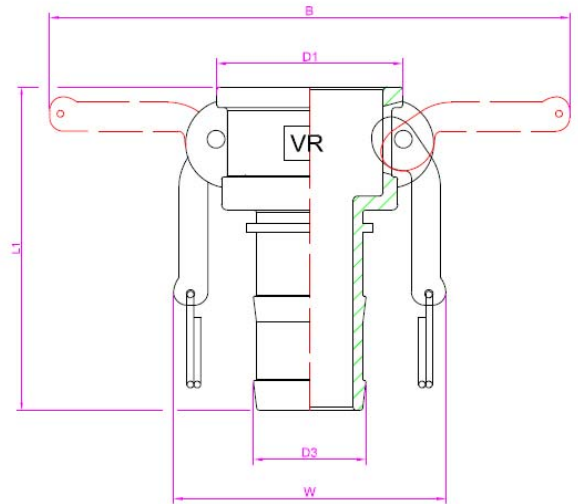

Raccordo Rapido FEMMINA con portagomma
Coupling female with hose shank

Filettatura/Thread : a pressione/crimped

pollici/inch.	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"
diam.	50	75	100	125	150	200	250	300	400	500	600
L1	78,4	91,4	103,2	120	120,1	130,7	149,4	179,4	184,8	178,6	216,8
D1	42,6	41,3	47,5	57,7	64,4	74,6	90,3	106,1	133,9	163,7	193,4
D3	14	21,3	25,5	34	39,9	52,6	66,8	78,7	106	128,9	157,8
B	111	107	132	181	188	200	209	249	276	300	386
W	60	55	68	83	92	105	113	137	170	184	230

Temperature Temperature	- 40°C / 240°C											
Dimensioni Dimensions	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"
Pressioni barg Pressure barg	40	40	40	40	40	40	16	16	16	8	8	6

Materiali Materials

AISI 316 / ASTM A 351 CF8M / EN 14408/1
AISI 304 / ASTM A 276-986 / EN 1.4301
OTTONE / Brass
POLIPROPILENE / Moplen
ALLUMINIO / Aluminium
Acciaio al carbonio

Altri materiali fornibili su richiesta.
Other materials on requests

According to: U.S. MIL-C-27487/ DIN 2828 / UNI EN 14420