
Decomposable Clamping Element

It's a small element, extremely easy to install and/or replace in the system where is used:
- Fewer parts of the production machine need to be displaced;
- No need to slide the blocking element along the whole length of the guide.

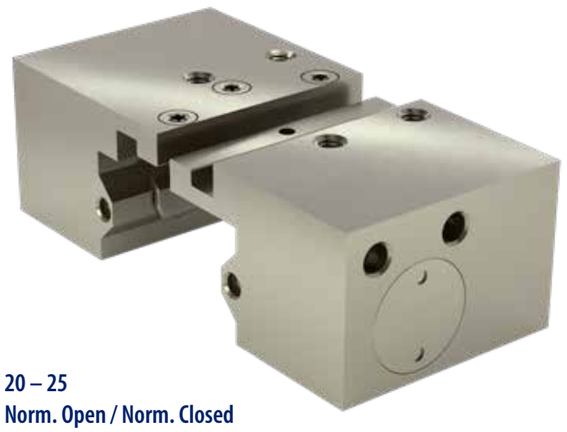

## Guide size	**20 – 25**
Working type	**Norm. Open / Norm. Closed**
Body	**Steel**
Operating Temp.	**-20°C ÷ 80°C**
Operating Pressure	**5,5 ÷ 8 bar**

- **Single-piston system**
- **Reduced length**
- **High clamping forces**
- **Precise positioning**
- **High rigidity**
- **Shaped profile**