FMCE Series Electric clamping element

ERRE DI


Bistable clamping element.
Keeping the element closed or open doesn't require voltage supply.

FMCE##--



## Guide size	**20 ÷ 25 mm**
Body	**Steel**
Operating Temperature	**-10°C ÷ 70°C**
Direct Current Voltage	**24 V**
Closing time	**< 3 Sec**
Opening time	**< 1.5 Sec**

- **Short length**
- **Self-locking**
- **5 pin connector**
- **Bistable**
- **Can be supplied complete with proximity sensor.**

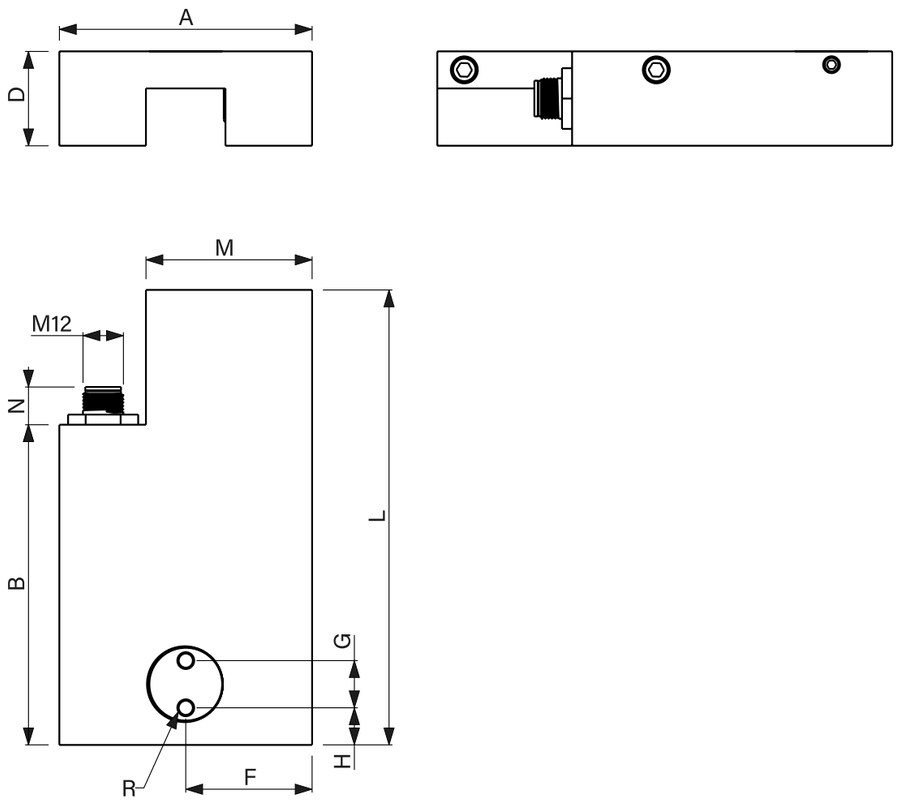

Type	Size	Holding Force [N]	A [mm]	B [mm]	D [mm]	F [mm]	G [mm]	H [mm]	L [mm]	M [mm]	N [mm]	R
FMCE	20 T0	1000	60	80	24	29.75	8	14	115	40.3	11.2	M4x5
FMCE	25 T0	1400	75	95	28	37.5	14	11	135	49.3	11.2	M5x7